

24" SIGNATURE SERIES DUAL-ZONE REFRIGERATOR/WINE RESERVE

HP24CS-3 24" INDOOR MODEL
HP24CO-3 24" OUTDOOR MODEL



Glass Door Model



Solid Door Model

GENERAL SIGNATURE SERIES FEATURES



- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Powerful yet efficient 995 BTU variable-speed compressor ramps up to quickly bring down temperature of room temperature product
- **Industry Exclusive** two independently-controlled temperature zones allow you to store wine and beverages together
- Commercial-grade stainless steel interior and exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- **Industry Exclusive** full extension refrigerator and wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Adjustable Crisp White and Cool Blue LED lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- State-of-the-art digital control module
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HP24CS/CO FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes two (2) full-extension wine shelves and one (1) full-extension refrigerator shelf
- Wine shelves feature stainless steel fronts
- Product capacity is 14 wine bottles and 41 cans (12 oz.)
- Wine Reserve (top zone) temperature 45°- 65°F
- Refrigerator (lower zone) temperature 33°- 42°F

ACCESSORIES

(L)	Factory Installed Lock
67991-L/R	Stacking Kit for HP24/HC24/HA24 models
66736	Caster Kit for HP24/HC24/HA24 models
RS-24-24D	Divider Shelf for HP24/HC24/HA24 models

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	24" (610 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	5.0 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	995 BTU, variable-speed
Plumbing	None Required
Annual Energy Usage	295 kWh/yr
Shipping Weight	203 lbs (92.08 kg.)

** Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

INDOOR MODELS


HP24CS-3-1L*	Stainless steel solid door, hinge left
HP24CS-3-2L*†	Panel ready solid door, hinge left
HP24CS-3-3L*	Stainless steel glass door, hinge left
HP24CS-3-4L*†	Panel ready glass door, hinge left

OUTDOOR MODELS


HP24CO-3-1L*	Stainless steel solid door, hinge left
HP24CO-3-2L*†	Panel ready solid door, hinge left
HP24CO-3-3L*	Stainless steel glass door, hinge left
HP24CO-3-4L*†	Panel ready glass door, hinge left

* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

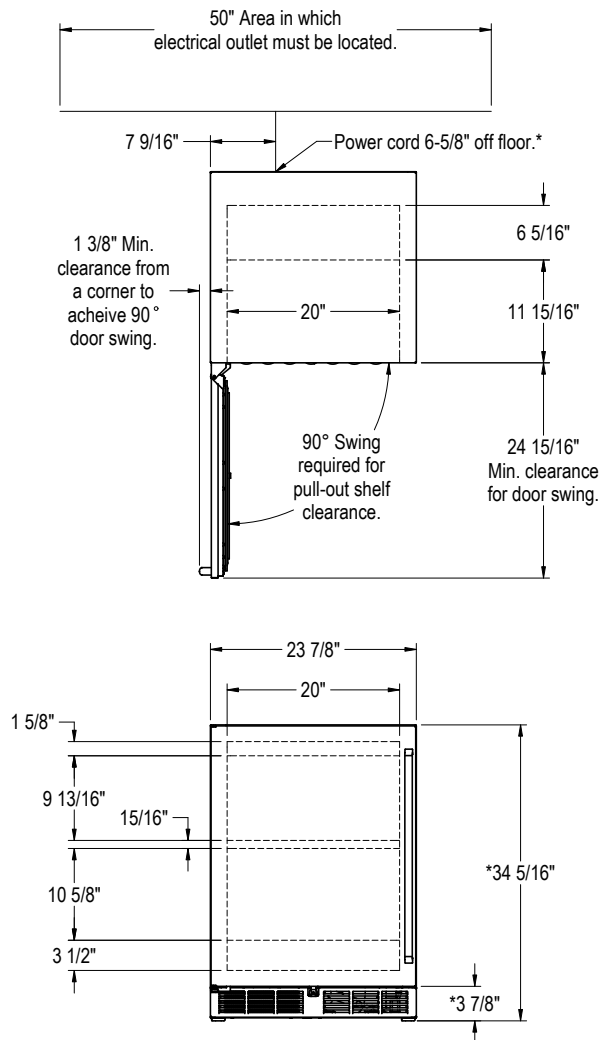

*- Leg leveler can add 3/4" to these dimensions when fully extended.

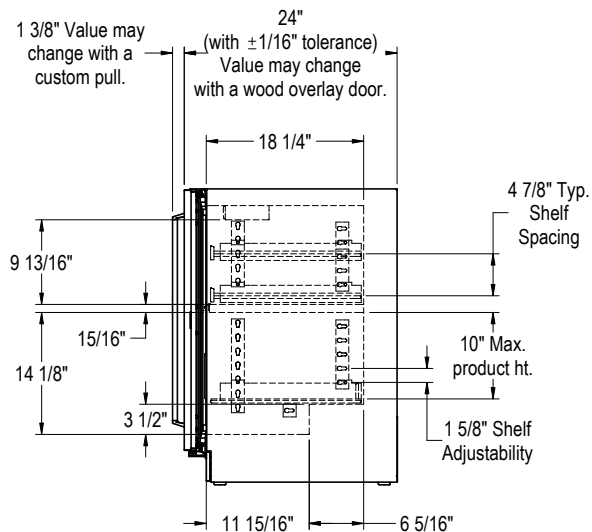

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2541
REV. A-09/07/2018